

# SFP+ – EDFA Pre-Amp

## Tech Specs

---

### **SFP-EDFA-PA-20-SO**

SFP+ Pre-Amp EDFA, 20dB Gain, -25 to -5dBm Input Power, 10dBm Output Power, AGC, Solid Optics

## **1. PRODUCT INTRODUCTION**

The Solid Optics first-in-the-world plug-and-play SFP+ EDFA provides very stable optical output power over a wide operating temperature range, with significantly lower power consumption. It is internally supported with input and output isolators for system stability and optimum performance. It incorporates electrical control circuitry with a microprocessor, including photodiodes for monitoring the optical input and output power. Due to the small size and easy installation, the SFP+ EDFA is designed for amplification of optical signals at C-band in fiber optic communications system in 5G network, high speed datacenter, core networks, SDN and CATV networks.

## **2. PRODUCT SPECIFICATION & FEATURES**

- Conventional SFP+ compatible size and pin map
- Cost efficiency with pluggable type
- Space efficiency using remaining slot (No extra equipment required)
- EDFA module including micro process control circuit
- Uncooled 980 nm pump laser module
- Extremely lower the heat generation
- High saturation output power up to 19dBm
- Selectable output power
- Wide input dynamic range
- Control & monitoring by I2C
- LVTTTL alarm
- Single + 3.3 V power supply

### 3. OPTICAL CHARACTERISTICS

PARAMETER	Symbol	Min.	Typ.	Max.	Unit
Signal Wavelength Range	$\lambda$	1527.99	-	1568.36	nm
Input Power	$P_{IN}$	-25	-	-5	dBm
Saturation Output Power	$P_{OUT}$	-	10 <sup>(2)</sup>	-	dBm
Gain	G	-	20 <sup>(2)</sup>	-	dB
Gain Setting Range	-	15	20	25	dB
Gain Flatness	$G_{FLAT}$	-	1	2	dB
Noise figure	NF	-	6.5	7.5	dB
Transient Performance <sup>(3)</sup> 1. Excursion Tr/Tf= 100us, 12dB Add/Drop 2. Gain Offset 3. Settling Time	TR - - -	-3 -0.8 -	- - -	4 -0.8 500	dB dB ms
Optical isolation	ISO	20	-	-	dB
Return loss	RL	40	-	-	dB
Polarization Mode Dispersion	PMD	-	-	0.5	ps
Polarization Dependent Gain	PDG	-	-	0.5	dB
Control Scheme	-		AGC		-

(1) Input power = +1dBm, set gain = 15dB, full wavelength range

(2) Input power = -10dBm, set gain = 20dB, full wavelength range


(3) at Typical gain. Excursion corresponds to Net Gain overshoot / undershoot

### 4. CONTROL & MONITORING FUNCTIONS

Parameter	Specification
Control Scheme	AGC with FLS*
Monitor	IPM / OPM / LD-Bias / Case-Temp
Alarm	LOS / LOP / LD-Bias / Gain

\*FLS: Forced Laser Shutdown

## 5. MECHANICAL DIMENSION

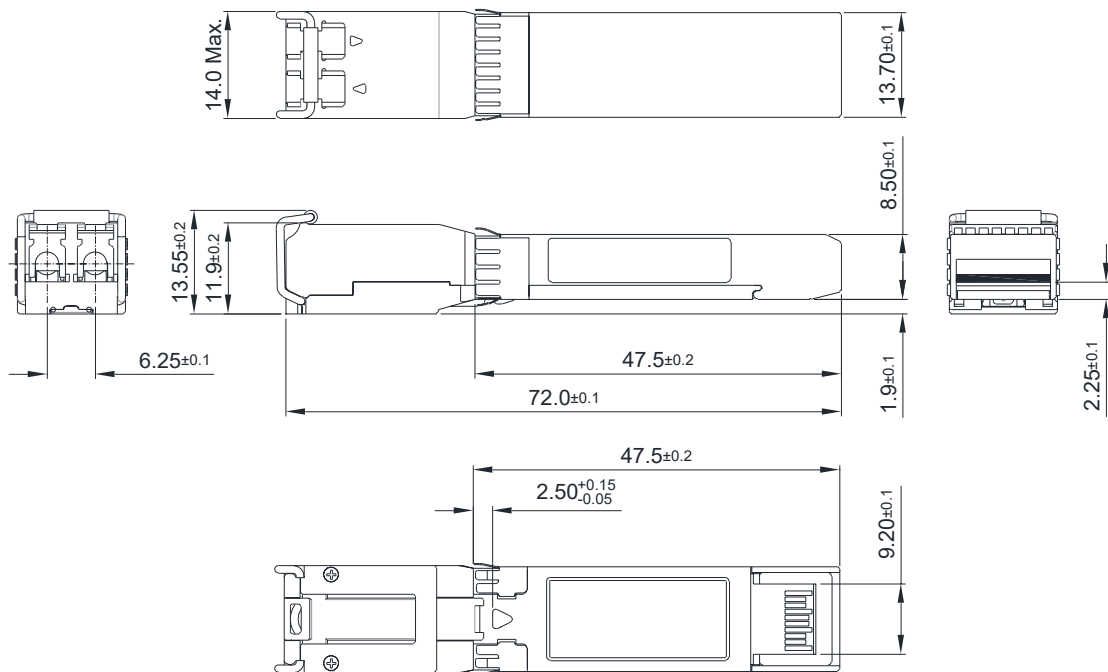

(WxLxH = 14 X 72 X 8.5 [mm])

## 6. ELECTRIC & ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification
Power Supply Voltage	+3.3V
Interface	I2C
Alarm	LVTTL
Operating Case Temperature	-5 ~ 75°C
Storage Temperature	-40 ~ 85°C
Storage Humidity	5 ~ 85% R.H
Power Consumption*	2.4 W

\* in max. input power and full temperature range

\* The cage with heatsink is recommended for normal operation.

## 7. WARNING & SYMBOLS



Solid Optics EU N.V. has tested the equipment based on European legislation. It is safe to use, doesn't intervene with other electronic devices and it is not affected by interference from other Electronic devices



Hazardous Goods; Our equipment complies with Directive 2011/65/EU (RoHS II) and 2002/95 EC (RoHS I).



Only (dis)connect the equipment in a EPA (ESD Protected Area) while using only certified equipment and taking all necessary precautions.

## 8. DISCLAIMER & COPYRIGHT

This document is written with the utmost care. Specifications, figures, data and illustrations provided in this document are based on information that is believed to be reliable and accurate. We don't accept any liability for damages derived from incomplete, inaccurate, outdated and/or otherwise incorrect specifications, figures, data or illustrations. We do not intend to suggest that we are the creators or trademark owners of any other manufacturers' products. Information is subject to change without notice. Solid Optics and the Solid Optics logo are registered trademarks of Solid Optics EU Holding N.V. All other trademarks are acknowledged as registered trademarks and proprietary to their respective owners. Copyright © 2019 Solid Optics EU N.V., Dutch Chamber of Commerce no. 39099087, all rights reserved. For more information visit [www.solid-optics.com](http://www.solid-optics.com)



## Get in touch

---



EU Customer Support  
+31 (0) 88 342 3776  
[info@solid-optics.com](mailto:info@solid-optics.com)



US Customer Support  
+1 855 678 4271  
[infous@solid-optics.com](mailto:infous@solid-optics.com)